


Industrial Monitor

Style 636

Unique Features of Protek Industrial Monitors

- 1 Powder coating produces a tough, corrosion resistant finish
- 2 Positive friction locks for both horizontal and vertical travel to hold desired position
- 3 Stainless steel lever for durability and easy control
- 4 Major components made from brass alloy (UNS C83600, ASTM B62) for a long-lasting service life
- 5 Optional flanges: ANSI, ASA, DIN or ISO
- 6 Double-row stainless steel ball bearings in monitor joints ensure smooth movements even when the monitor is under pressure
- 7 Compatible with Protek's diverse range of water and self-educing foam monitor nozzles for various applications
- 8 Optimises advanced computer aided design and testing technology to minimise flow turbulence

Style 636 monitor shown
with Style 823-BC nozzle

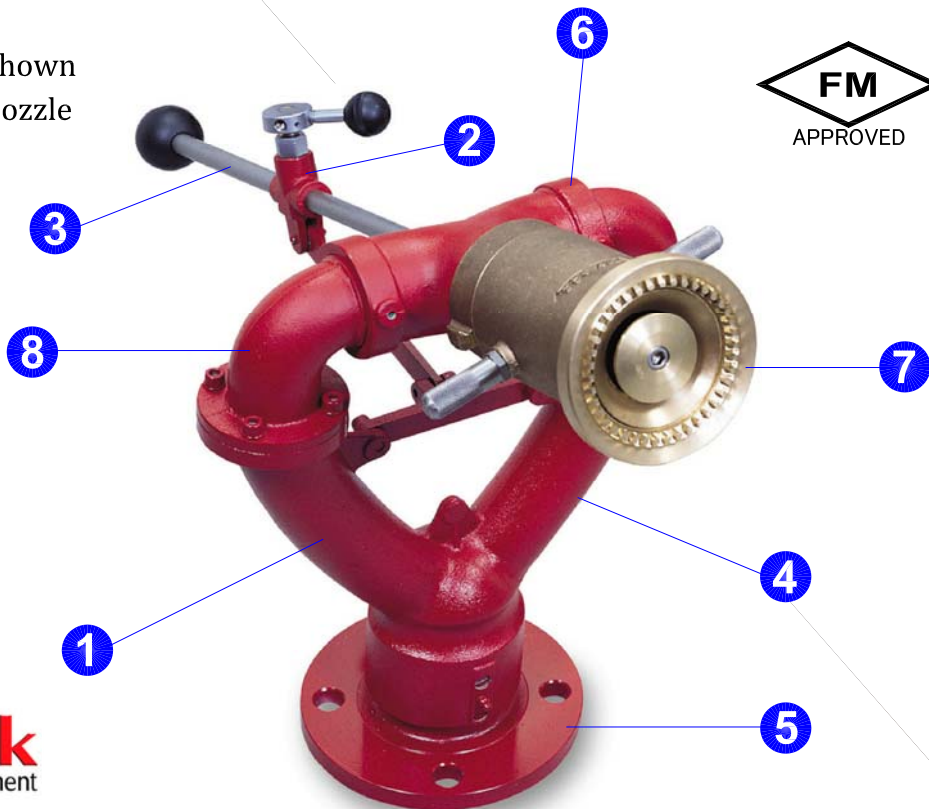

**Protek**
Fire Fighting Equipment



Industrial Monitor

Style 636

Specification

- Corrosion resistant brass construction ideal for marine, offshore, industrial and other corrosive environments
- Full 2-1/2" waterway for flow rate of up to 750 GPM (2900 LPM)
- Full 360° rotation
- Vertical travel of 135° from 75° above to 60° below horizontal
- Positive friction locks for both horizontal and vertical travel to hold desired position
- Operating pressure of 200 psi (14 bar)
- Stainless steel lever for durability and easy control
- Standard unit painter red
- Compatible with Protek's diverse range of water and self-deucting foam monitor nozzles
- FM approved

		Style 636			
Max. GPM (LPM)		750(2900)			
Inlet	Size	3"	4"	6"	2-1/2"
	Type	Flange		Female Thread	
Outlet		2-1/2"			
Control		Tiller Bar			
Material		Brass			
Finish		Red Powder Coating			
Friction Loss		35 psi at 750 GPM			
		18 psi at 500 GPM			
Travel		135° Vertical			
		360° Rotation			
Weight		44 Lbs. (20 kg)			
Cercification		FM			

