




**Rack Hose-FBX Series**

A single jacket 100% filament polyester hose intended for interior protection and occupant use in buildings and plants. Rack Hose-FBX is lined with thermoplastic polyurethane (TPU). Light-weight and compact. FBX rack hose has a service test pressure rating of 150 Psig (1035kpa) and 250 Psig (1750 kpa) and is approximately half the weight of conventional rubber lined single jacket hose.


**Pressure Requirement:**

I.D. (Inch)	Service Test Pressure (Psi)	Burst Pressure (Psi)	Certification
1-1/2"	150,250	450,750	
1-3/4"	150,250	450,750	
2"	150,250	450,750	
2-1/2"	150,250	450,750	
I.D. (Inch)	Service Test Pressure (Psi)	Burst Pressure (Psi)	Certification

1-1/2"	250	750	
--------	-----	-----	---

**Construction:**

Filament polyester as warp and weft, thermoplastic polyurethane (TPU) liner.

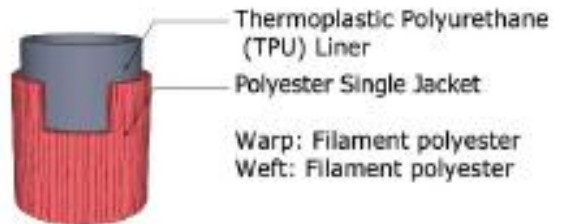

**Application:** Building protection.

**Color:** White, other color on request.

**Couplings:**

Brass NST / NPSH expansion ring threaded coupling, other fittings on request.

**Standard Length:** 50', 75', 100', folded or rolled to your request.